## CDM SYMBOL KEY

- WARNING OF SIGNIFICANT RISK
- PROHIBITED ACTION
- PARTICULAR ACTION ENCOURAGED
- CDM INFORMATION

## GENERAL NOTES

1. All drawings to be read in conjunction with the specification.
2. All drawings to be read in conjunction with the relevant architectural and structural drawings.
3. All dimensions are in millimetres unless noted otherwise.
4. All levels are in metres relative to ground floor finished floor level unless noted otherwise.
5. All dimensions are to be checked on site by the contractor prior to commencement of construction.
6. Where IFC files or other 3D building model formats are issued these are provided for information only, may not be accurate and are not to be fully relied on. In all cases the drawings are to be used for tender purposes and to set out structural elements for construction.

## STEELWORK NOTES

1. All steelwork to be grade S355JR in accordance with BE EN 10025 unless noted otherwise, other than;
   a) all hollow sections to be grade S355NH in accordance with BS EN 10210-1;
   b) all cross flat bracing and general plate steels to be grade S275JR.
2. Minimum size of fillet weld to be 6mm unless noted otherwise.
3. All fillet welds to be continuous unless noted otherwise.
4. Steelwork to be fabricated to an execution class of EX2 in accordance with BE EN 1090.
5. The structural drawings show primary steel members, purlins and side rails. Secondary steelwork such as cleader angles, vertical top hats etc. are to be provided by the cladding/roofing sub-contractor. If an item is not indicated on the drawing and it is required by the cladding/roofing sub-contractor, they must include for such members.
6. The steelwork fabricator is to ensure any bolts and fixings do not clash with glazing frames. This may require the use of countersunk bolts.
7. All columns are to be provided with a column encasement below ground level of at least 100mm from the face of steel.




S2 **Sectiom-S2**
SCALE 1 : 50




S3 **Step Detail along Grid-5**
SCALE 1 : 10

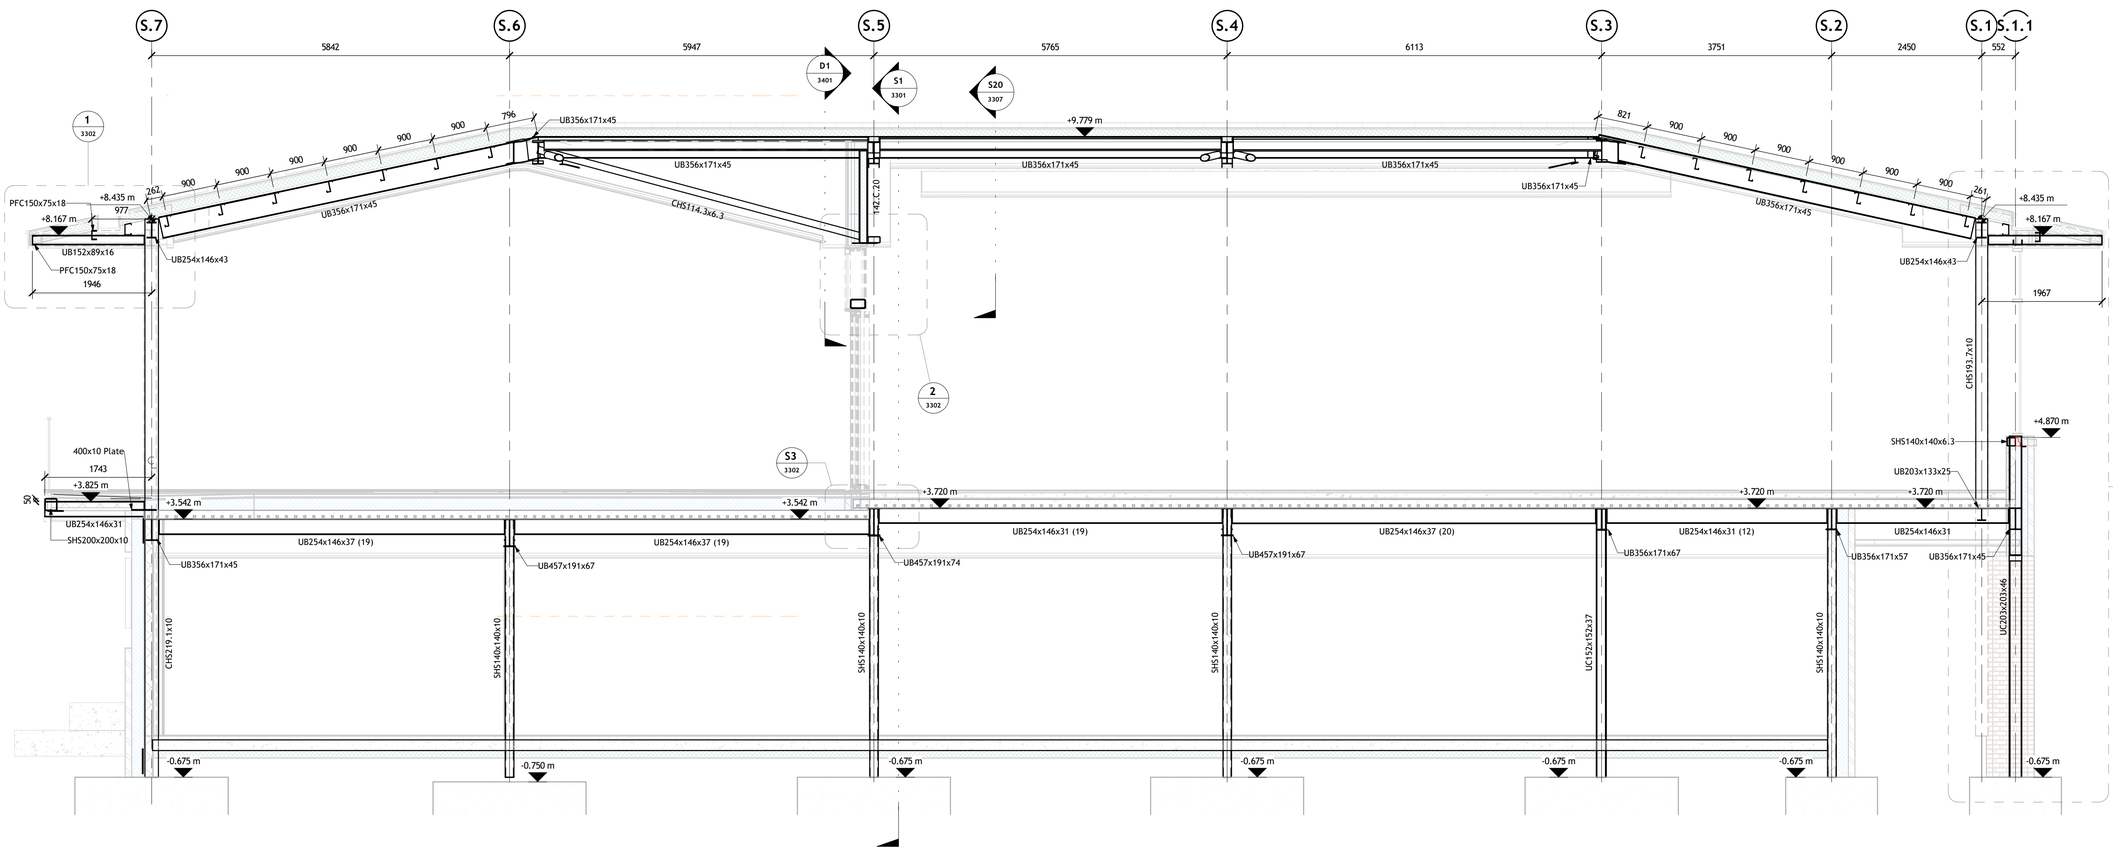


1 **S2 - C1**
SCALE 1 : 20

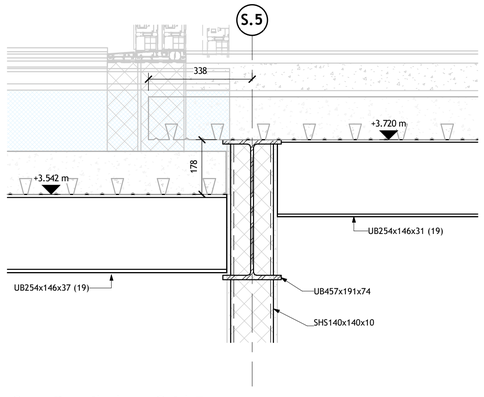


2 **S2 - Callout 1**
SCALE 1 : 20

| Rev | Date | Description | By |
|---|---|---|---|
| C05 | 28/01/25 | A4: Approved for Stage 4 | NCT |
| C02 | 14/10/24 | A1: Full Tender Issue | NCT |
| P1 | 02/02/24 | Issued For Coordination | NCT |

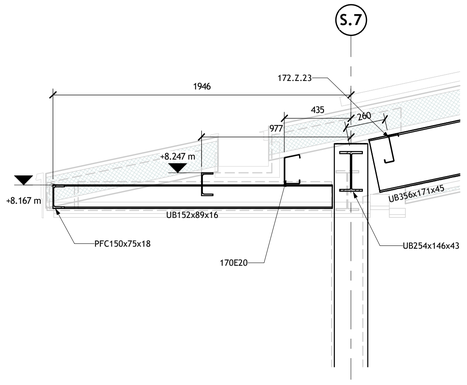Project
New Sports Pavilion
Stockport Grammar School
Buxton Road

Client
Stockport Grammar School

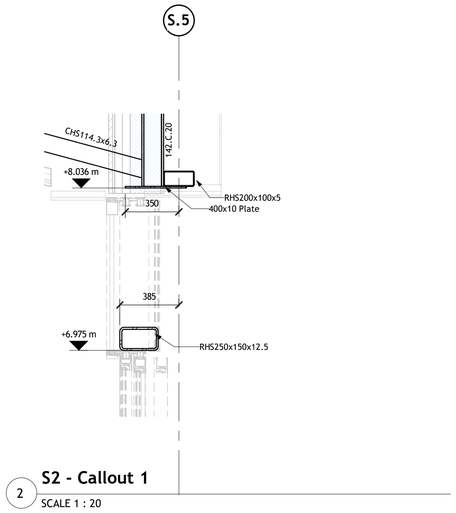Drawing Title
SUPERSTRUCTURE
SECTIONS SHEET 2

Project - Originator - Func. - Spat. - Form - Disc. - Number
8984 - SWF - XX - XX - D - S - 3302

| Scale | As Indicated | @ A1 | Date | January 2024 | By | NCT | Chkd | PSS |
|---|---|---|---|---|---|---|---|---|

| Status | Revison | Classification |
|---|---|---|
| A4: Approved Stage 4 | C05 | PM_40_40 |


Unit 1 Millbank House, Riverside Business Park
Wilmslow, Cheshire, SK9 1BJ
Tel: 01625 419866
email: mail@swf.uk.com
www.swf.uk.com

SWF CONSULTING
CONSULTING CIVIL & STRUCTURAL ENGINEERS